


欧式 PCB 板接线端子 Euro for PCB terminal blocks

EL3HT

Pitch: 7.5/7.62 mm

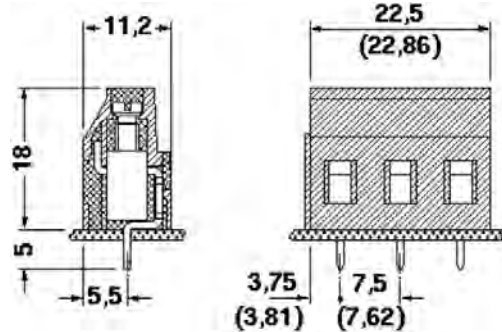

技术数据

IEC 数据	刚性导线 mm ²	柔性导线 mm ²	I A	U V
连接数据	0.2-4	0.2-2.5	24	250
绝缘材料组别			I	
过电压类别		III	III	II
污染等级		3	2	2
额定电压(V)		500	630	1000
额定冲击电压(KV)			6	
绝缘材料/阻燃等级			PA / UL94 V0	
螺钉/扭矩(-Nm)			M3 / 0.5-0.6	
剥线长度(mm)			6	
引脚尺寸(mm)			0.8x1.0	
线路板孔径(mm)			Φ 1.3	
UL 数据				
额定电压/电流(V/A)			300 / 15	
压线范围(AWG)			30-12	

Technical Data

IEC Data	Rigid Solid mm ²	Flexible stranded mm ²	I A	U V
Connection data	0.2-4	0.2-2.5	24	250
Insulating Material Group			I	
Overvoltage Category		III	III	II
Pollution degree		3	2	2
Rate Voltage(V)		500	630	1000
Rate impulse Voltage(KV)			6	
Insu. Material / Inflamm. class			PA / UL94 V0	
Screw/Torque(-Nm)			M3 / 0.5-0.6	
Stripping length(mm)			6	
Terminal Dimension(mm)			0.8x1.0	
PCB Hole diameter(mm)			Φ 1.3	
UL Data				
Rate Voltage/Current(V/A)			300 / 15	
Wire Range(AWG)			30-12	

定货型号 How to Order No.

位数 No. of Positons	间距 pitch: 7.62mm
2	EL3HT-02-7.62
3	EL3HT-03-7.62

说明：以上为标准颜色：GN=Green 绿色，省略。

可拼接最长位数不超过 24 位。