


栅栏式接线端子 Barrier Style terminal blocks



**B10-HR**

**Pitch: 10 mm**

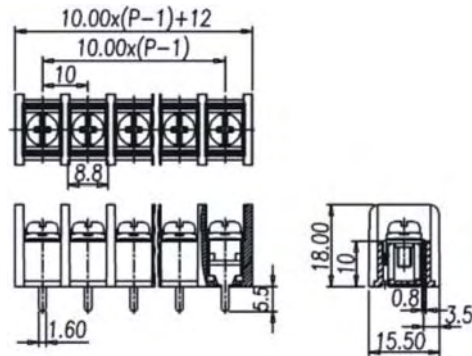

**B10F-HR**

**Pitch: 10 mm**

**技术数据**

**Technical Data**

额定电参数	Rating	300V 20A
压线范围	Wire Range	22~12 AWG
螺钉 / 力矩	Screw / Torque Rating	Steel, M3.5, Nickel plated / 1.0N·m
外壳	Insulator Body	PA66, UL94 V0
工频耐电压	Insulation withstand Voltage	AC2000V at 1 minute
绝缘阻抗	Insulation Resistance	500MΩ or more at DC500V
使用温度	Working Temperature	-40℃ ~ +105℃

**定货型号 How to Order No.**

位数 No. of Positons	B10-HR	B10F-HR
2	B10-HR-02	B10F-HR-02
3	B10-HR-03	B10F-HR-03
...	...	...
25	B10-HR-25	B10F-HR-25
26	B10-HR-26	B10F-HR-26