


栅栏式接线端子 Barrier Style terminal blocks



B11.125-H

Pitch: 11.125 mm

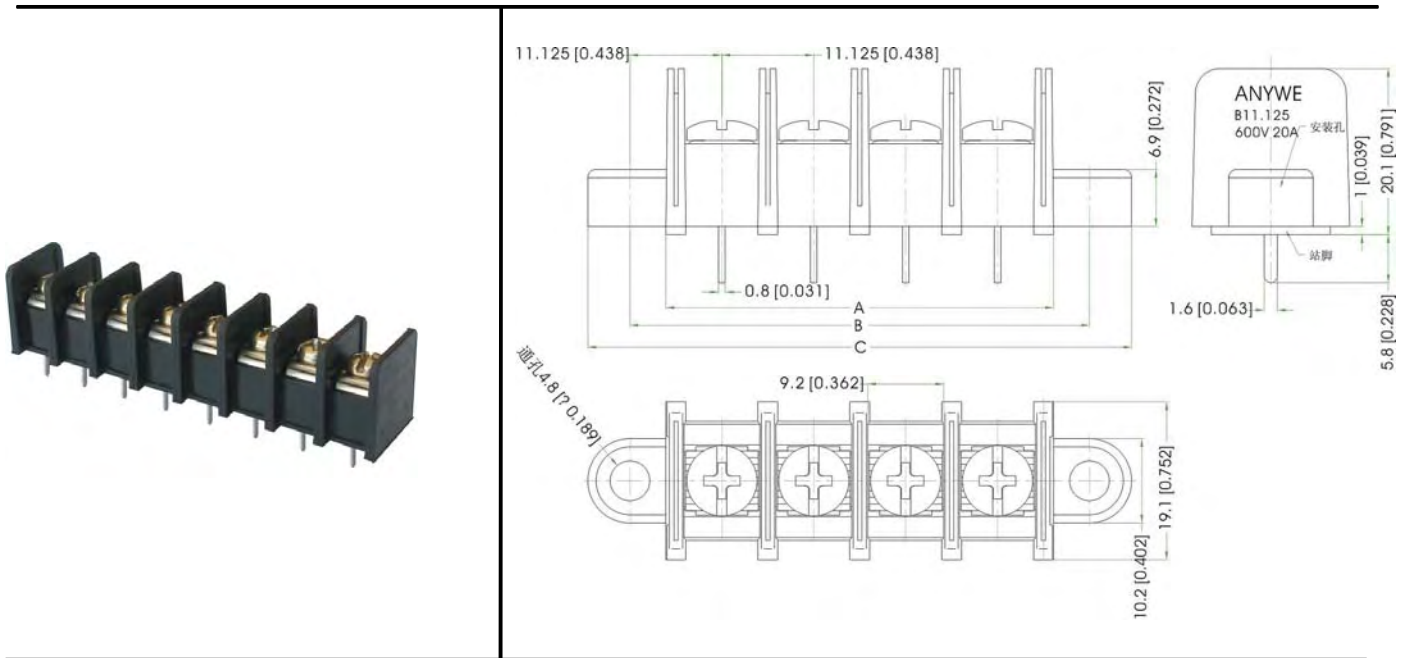

技术数据

Technical Data

额定电参数	Rating	600V 20A
压线范围	Wire Range	24~12 AWG
螺钉 / 力矩	Screw / Torque Rating	Steel, M4, Nickel plated / 1.8N · m
外壳	Insulator Body	PBT, UL94 V0
工频耐电压	Insulation withstand Voltage	AC3000V at 1 minute
绝缘阻抗	Insulation Resistance	1000MΩ or more at DC500V
使用温度	Working Temperature	-40℃ ~ +130℃

定货型号 How to Order No.

位数 No. of Positons	B11.125□□-H	
2	B9.52□□-H-02	
3	B9.52□□-H-03	
...	...	
27	B9.52□□-H-27	
28	B9.52□□-H-28	

说明: □□的含义:

-F: 两端有安装耳, 有安装耳时最大位数是 28 位; -P: 底部有站脚。