


栅栏式接线端子 Barrier Style terminal blocks



B12.7-HFR

Pitch: 12.7 mm

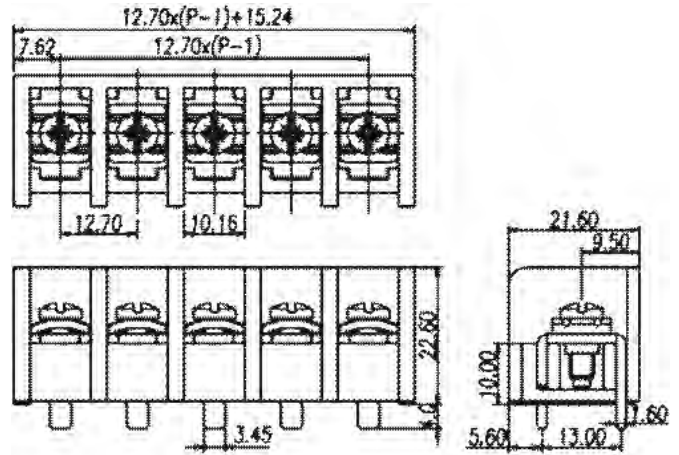

F:Front; R: real。即引脚一位在前面，一位在后面伸出，错位排列。

技术数据

Technical Data

额定电参数	Rating	600V 45A
压线范围	Wire Range	18~8 AWG
螺钉 / 力矩	Screw / Torque Rating	Steel, M4, Nickel plated / 1.8N · m
外壳	Insulator Body	PBT, UL94 V0
工频耐电压	Insulation withstand Voltage	AC2500V at 1 minute
绝缘阻抗	Insulation Resistance	1000MΩ or more at DC500V
使用温度	Working Temperature	-40℃ ~ +130℃

定货型号 How to Order No.

位数 No. of Positons	B12.7-HFR	
2	B12.7-HFR-02	
3	B12.7-HFR-03	
...	...	
14	B12.7-HFR-14	
15	B12.7-HFR-15	