


反向插拔式接线端子 Sockets for Inverted pluggable terminal blocks



S2.5IHF

Pitch: -/5.08 mm

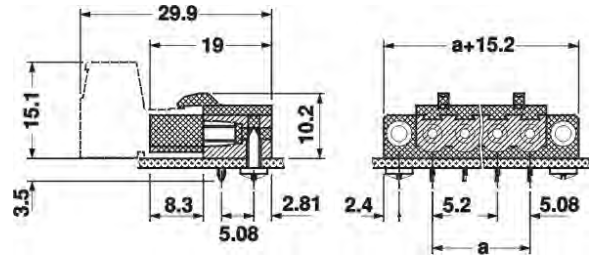

技术数据

IEC 数据	刚性	柔性	I	U
	导线	导线		
	mm ²	mm ²	A	V
连接数据	-	-	12	250
绝缘材料组别			I	
污染等级		3	2	2
过电压类别		III	III	II
额定电压(V)		250	320	630
额定冲击电压(KV)			4	
绝缘材料/阻燃等级		PA / UL94 V0		
线路板孔径(mm)		Φ 1.4		
引脚尺寸(mm)		1.3x0.7		

Technical Data

IEC Data	Rigid	Flexible	I	U
	mm ²	mm ²		
	mm ²	mm ²	A	V
Connection data	-	-	12	250
Insulating Material Group			I	
Pollution degree		3	2	2
Overvoltage Category		III	III	II
Rate Voltage(V)		250	320	630
Rate impulse Voltage(KV)			4	
Insu. material / Inflamm. class		PA / UL94 V0		
PCB Hole Diameter(mm)		Φ 1.4		
Pin Dimensions(mm)		1.3x0.7		

UL 数据

额定电压/电流(V/A)	300 / 15
压线范围(AWG)	-

UL Data

Rate Voltage/Current(V/A)	300 / 15
Wire Range(AWG)	-

定货型号 How to Order No.

位数 No. of Positions	间距 pitch: 5.0 mm	间距 pitch: 5.08 mm
2	-	S2.5IHF-02-5.08
3	-	S2.5IHF-03-5.08
...
23	-	S2.5IHF-23-5.08
24	-	S2.5IHF-24-5.08

说明：以上为标准颜色：GN=Green 绿色，省略。