


轨装式插拔接线端子 Plug-In for Rail Mounting pluggable terminal blocks

BL2.5R15MV

Pitch: 5.08 mm

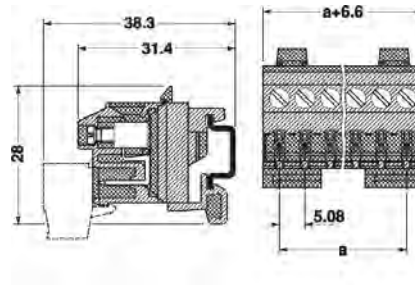

For mounting on 15x5 mm mounting rail in acc. With EN 60715-TH15

技术数据

Technical Data

| IEC 数据      | 刚性              | 柔性              | I   | U   |
|-------------|-----------------|-----------------|-----|-----|
|             | 导线              | 导线              |     |     |
|             | mm <sup>2</sup> | mm <sup>2</sup> | A   | V   |
| 连接数据        | 0.2-2.5         | 0.2-2.5         | 12  | 250 |
| 绝缘材料组别      |                 |                 | I   |     |
| 污染等级        |                 | 3               | 2   | 2   |
| 过电压类别       |                 | III             | III | II  |
| 额定电压(V)     |                 | 320             | 320 | 630 |
| 额定冲击电压(KV)  |                 |                 | 4   |     |
| 绝缘材料/阻燃等级   |                 | PA / UL94 V0    |     |     |
| 螺钉/扭矩(-/Nm) |                 | M3 / 0.5-0.6    |     |     |
| 剥线长度(mm)    |                 | 7               |     |     |

| IEC Data                       | Rigid           | Flexible        | I   | U   |
|--------------------------------|-----------------|-----------------|-----|-----|
|                                | Solid           | stranded        |     |     |
|                                | mm <sup>2</sup> | mm <sup>2</sup> | A   | V   |
| Connection data                | 0.2-2.5         | 0.2-2.5         | 12  | 250 |
| Insulating Material Group      |                 |                 | I   |     |
| Pollution degree               |                 | 3               | 2   | 2   |
| Overvoltage Category           |                 | III             | III | II  |
| Rate Voltage(V)                |                 | 320             | 320 | 630 |
| Rate impulse Voltage(KV)       |                 |                 | 4   |     |
| Insu. material / Inflam. class |                 | PA / UL94 V0    |     |     |
| Screw/Torque(-/Nm)             |                 | M3 / 0.5-0.6    |     |     |
| Stripping length(mm)           |                 | 7               |     |     |

UL 数据

|              |          |
|--------------|----------|
| 额定电压/电流(V/A) | 300 / 15 |
| 压线范围(AWG)    | 30-12    |

UL Data

|                           |          |
|---------------------------|----------|
| Rate Voltage/Current(V/A) | 300 / 15 |
| Wire Range(AWG)           | 30-12    |

定货型号 How to Order No.

| 位数 No. of Positons | 间距 pitch: mm | 间距 pitch: 5.08mm   |
|--------------------|--------------|--------------------|
| 2                  | -            | BL2.5R15MV-02-5.08 |
| 3                  | -            | BL2.5R15MV-03-5.08 |
| ...                | ...          | ...                |
| 23                 | -            | BL2.5R15MV-23-5.08 |
| 24                 | -            | BL2.5R15MV-24-5.08 |

说明：以上为标准颜色：GN=Green 绿色，省略。