


轨装式插拔接线端子 Plug-In for Rail Mounting pluggable terminal blocks

BL2.5R15MVF

Pitch: 5.08 mm

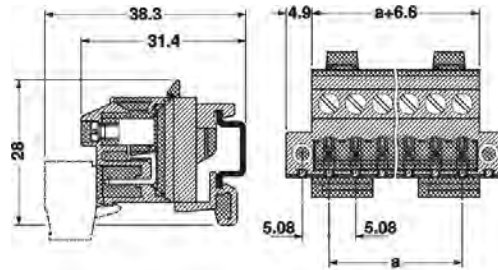

For mounting on 15x5 mm mounting rail in acc. With EN 60715-TH15

技术数据

IEC 数据	刚性	柔性	I	U
	导线	导线		
	mm ²	mm ²	A	V
连接数据	0.2-2.5	0.2-2.5	12	250
绝缘材料组别			I	
污染等级		3	2	2
过电压类别		III	III	II
额定电压(V)		320	320	630
额定冲击电压(KV)			4	
绝缘材料/阻燃等级			PA / UL94 V0	
螺钉/扭矩(-/Nm)			M3 / 0.5-0.6	
剥线长度(mm)			7	

Technical Data

IEC Data	Rigid	Flexible	I	U
	Solid	stranded		
	mm ²	mm ²	A	V
Connection data	0.2-2.5	0.2-2.5	12	250
Insulating Material Group			I	
Pollution degree		3	2	2
Overvoltage Category		III	III	II
Rate Voltage(V)		320	320	630
Rate impulse Voltage(KV)			4	
Insu. material / Inflam. class			PA / UL94 V0	
Screw/Torque(-/Nm)			M3 / 0.5-0.6	
Stripping length(mm)			7	

UL 数据

额定电压/电流(V/A)	300 / 15
压线范围(AWG)	30-12

UL Data

Rate Voltage/Current(V/A)	300 / 15
Wire Range(AWG)	30-12

定货型号 How to Order No.

位数 No. of Positons	间距 pitch: mm	间距 pitch: 5.08mm
2	-	BL2.5R15MVF-02-5.08
3	-	BL2.5R15MVF-03-5.08
...
23	-	BL2.5R15MVF-23-5.08
24	-	BL2.5R15MVF-24-5.08

说明：以上为标准颜色：GN=Green 绿色，省略。