


## 插拔式接线端子 Plugs for pluggable terminal blocks



**BL2.5HF**

**Pitch: 7.5/7.62 mm**

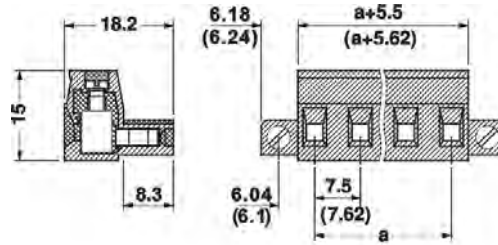

### 技术数据

IEC 数据	刚性 导线 mm <sup>2</sup>	柔性 导线 mm <sup>2</sup>	I A	U V
连接数据	0.2- 2.5	0.2- 2.5	12	400
绝缘材料组别			I	
污染等级		3	2	2
过电压类别		III	III	II
额定电压(V)		400	630	1000
额定冲击电压(KV)			6	
绝缘材料/阻燃等级		PA / UL94 V0		
螺钉/扭矩(-/Nm)		M3 / 0.5-0.6		
剥线长度(mm)		7		

### Technical Data

IEC Data	Rigid mm <sup>2</sup>	Flexible mm <sup>2</sup>	I A	U V
Connection data	0.2-2. 5	0.2-2.5	12	400
Insulating Material Group			I	
Pollution degree		3	2	2
Overvoltage Category		III	III	II
Rate Voltage(V)		400	630	1000
Rate impulse Voltage(KV)			4	
Insu. material / Inflamm. class		PA / UL94 V0		
Screw/Torque(-/Nm)		M3 / 0.5-0.6		
Stripping length(mm)		7		

### UL 数据

额定电压/电流(V/A)	300 / 15
压线范围(AWG)	30-12

### UL Data

Rate Voltage/Current(V/A)	300 / 15
Wire Range(AWG)	30-12

### 订货型号 How to Order No.

位数 No. of Positons	间距 pitch: 7.5mm	间距 pitch:7.62mm
2	BL2.5HF-02-7.5	BL2.5HF-02-7.62
3	BL2.5HF-03-7.5	BL2.5HF-03-7.62
...	...	...
11	BL2.5HF-11-7.5	BL2.5HF-11-7.62
12	BL2.5HF-12-7.5	BL2.5HF-12-7.62

说明：以上为标准颜色：GN=Green 绿色，省略。可选择的还有 BK=Black 黑色，如：BL2.5HF-10-7.62-BK；BU=Blue 蓝色。