


插拔式接线端子 Plugs for pluggable terminal blocks



BL2.5H

Pitch: 7.5/7.62 mm

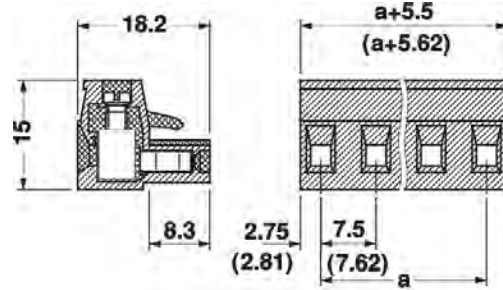

技术数据

IEC 数据	刚性	柔性	I	U
	导线	导线		
	mm ²	mm ²	A	V
连接数据	0.2- 2.5	0.2- 2.5	12	400
绝缘材料组别			I	
污染等级		3	2	2
过电压类别		III	III	II
额定电压(V)		400	630	1000
额定冲击电压(KV)			6	
绝缘材料/阻燃等级		PA / UL94 V0		
螺钉/扭矩(-/Nm)		M3 / 0.5-0.6		
剥线长度(mm)			7	

Technical Data

IEC Data	Rigid	Flexible	I	U
	mm ²	mm ²		
Connection data	0.2-2.5	0.2-2.5	12	400
Insulating Material Group			I	
Pollution degree		3	2	2
Overvoltage Category		III	III	II
Rate Voltage(V)		400	630	1000
Rate impulse Voltage(KV)			4	
Insu. material / Inflamm. class		PA / UL94 V0		
Screw/Torque(-/Nm)		M3 / 0.5-0.6		
Stripping length(mm)			7	

UL 数据

额定电压/电流(V/A)	300 / 15
压线范围(AWG)	30-12

UL Data

Rate Voltage/Current(V/A)	300 / 15
Wire Range(AWG)	30-12

定货型号 How to Order No.

位数 No. of Positons	间距 pitch: 7.5mm	间距 pitch:7.62mm
2	BL2.5H-02-7.5	BL2.5H-02-7.62
3	BL2.5H-03-7.5	BL2.5H-03-7.62
...
11	BL2.5H-11-7.5	BL2.5H-11-7.62
12	BL2.5H-12-7.5	BL2.5H-12-7.62

说明：以上为标准颜色：GN=Green 绿色，省略。可选择的还有 BK=Black 黑色，如：BL2.5H-10-7.62-BK；BU=Blue 蓝色。