


## 插拔式接线端子 Plugs for pluggable terminal blocks



**BL2.5H**

**Pitch: 5.0/5.08 mm**

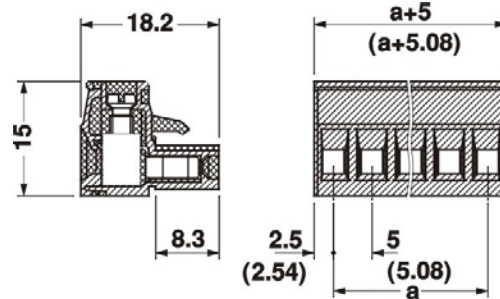

### 技术数据

IEC 数据	刚性 导线 mm <sup>2</sup>	柔性 导线 mm <sup>2</sup>	I A	U V
连接数据	0.2- 2.5	0.2- 2.5	12	250
绝缘材料组别			I	
污染等级		3	2	2
过电压类别		III	III	II
额定电压(V)		250	320	630
额定冲击电压(KV)			4	
绝缘材料/阻燃等级		PA / UL94 V0		
螺钉/扭矩(-/Nm)		M3 / 0.5-0.6		
剥线长度(mm)			7	

### Technical Data

IEC Data	Rigid mm <sup>2</sup>	Flexible mm <sup>2</sup>	I A	U V
Connection data	0.2-2. 5	0.2-2.5	12	250
Insulating Material Group			I	
Pollution degree		3	2	2
Overvoltage Category		III	III	II
Rate Voltage(V)		250	320	630
Rate impulse Voltage(KV)			4	
Insu. material / Inflamm. class		PA / UL94 V0		
Screw/Torque(-/Nm)		M3 / 0.5-0.6		
Stripping length(mm)			7	

### UL 数据

额定电压/电流(V/A)	300 / 15
压线范围(AWG)	30-12

### UL Data

Rate Voltage/Current(V/A)	300 / 15
Wire Range(AWG)	30-12

### 定货型号 How to Order No.

位数 No. of Positons	间距 pitch: 5.0mm	间距 pitch:5.08mm
2	BL2.5H-02-5.0	BL2.5H-02-5.08
3	BL2.5H-03-5.0	BL2.5H-03-5.08
...	...	...
23	BL2.5H-23-5.0	BL2.5H-23-5.08
24	BL2.5H-24-5.0	BL2.5H-24-5.08

说明：以上为标准颜色：GN=Green 绿色，省略。可选择的还有 BK=Black 黑色，如：BL2.5H-10-5.08-BK；BU=Blue 蓝色。