



插拔式接线端子 Plugs for pluggable terminal blocks

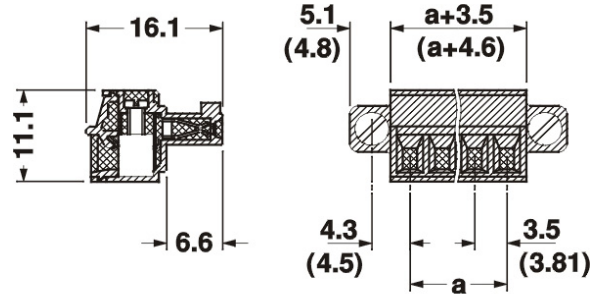

BL1.5HF

Pitch: 3.5/3.81 mm

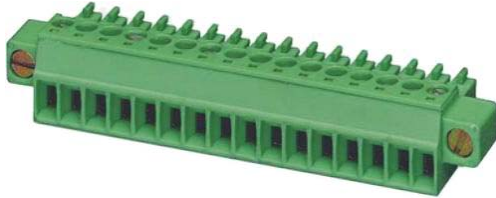

技术数据

IEC 数据	刚性 导线 mm ²	柔性 导线 mm ²	I A	U V
连接数据	0.08 -1.5	0.08 -1.5	8	160
绝缘材料组别			I	
污染等级		3	2	2
过电压类别		III	III	II
额定电压(V)		160	160	320
额定冲击电压(KV)			2.5	
绝缘材料/阻燃等级		PA / UL94 V0		
螺钉/扭矩(-Nm)		M2 / 0.22-0.25		
剥线长度(mm)		7		

Technical Data

IEC Data	Rigid mm ²	Flexible mm ²	I A	U V
Connection data	0.08- 1.5	0.08-1.5	8	160
Insulating Material Group			I	
Pollution degree		3	2	2
Overvoltage Category		III	III	II
Rate Voltage(V)		160	160	320
Rate impulse Voltage(KV)			2.5	
Insu. material / Inflamm. class		PA / UL94 V0		
Screw/Torque(-Nm)		M2 / 0.22-0.25		
Stripping length(mm)		7		

UL 数据

额定电压/电流(V/A)	300 / 10
压线范围(AWG)	30-14

UL Data

Rate Voltage/Current(V/A)	300 / 10
Wire Range(AWG)	30-14

定货型号 How to Order No.

位数 No. of Positons	间距 pitch: 3.5mm	间距 pitch: 3.81mm
2	BL1.5HF-02-3.5	BL1.5HF-02-3.81
3	BL1.5HF-03-3.5	BL1.5HF-03-3.81
...
23	BL1.5HF-23-3.5	BL1.5HF-23-3.81
24	BL1.5HF-24-3.5	BL1.5HF-24-3.81

说明：以上为标准颜色：GN=Green 绿色，省略。可选择的还有 BK=Black 黑色；BU=Blue 蓝色，如：BL1.5HF-10-3.81-BU。