


功率型插拔式接线端子 Plugs for Power pluggable terminal blocks



BSC4HF

Pitch: 7.62 mm

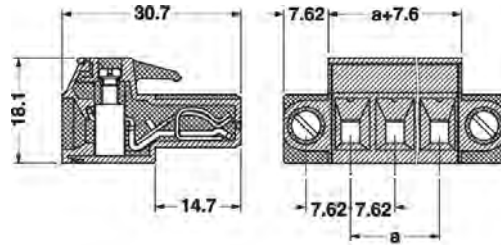

技术数据

IEC 数据	刚性 导线 mm ²	柔性 导线 mm ²	I A	U V
连接数据	0.2-4	0.2-4	20	400
绝缘材料组别			I	
污染等级		3	2	2
过电压类别		III	III	II
额定电压(V)		400	630	1000
额定冲击电压(KV)			6	
绝缘材料/阻燃等级		PA / UL94 V0		
螺钉/扭矩(-/Nm)		M3 / 0.5-0.6		
剥线长度(mm)			7	

Technical Data

IEC Data	Rigid mm ²	Flexible mm ²	I A	U V
Connection data	0.2-4	0.2-4	20	400
Insulating Material Group			I	
Pollution degree		3	2	2
Overvoltage Category		III	III	II
Rate Voltage(V)		400	630	1000
Rate impulse Voltage(KV)			6	
Insu. material / Inflam. class		PA / UL94 V0		
Screw/Torque(-/Nm)		M3 / 0.5-0.6		
Stripping length(mm)			7	

UL 数据

额定电压/电流(V/A)	300 / 20
压线范围(AWG)	30-10

UL Data

Rate Voltage/Current(V/A)	300 / 20
Wire Range(AWG)	30-10

定货型号 How to Order No.

位数 No. of Positons	间距 pitch: mm	间距 pitch: 7.62mm
2	-	BSC4HF-02-7.62
3	-	BSC4HF-03-7.62
...
11	-	BSC4HF-11-7.62
12	-	BSC4HF-12-7.62

说明：以上为标准颜色：GN=Green 绿色，省略。