


## 欧式 PCB 板接线端子 Euro for PCB terminal blocks

EL5AT

Pitch: 9.52 mm

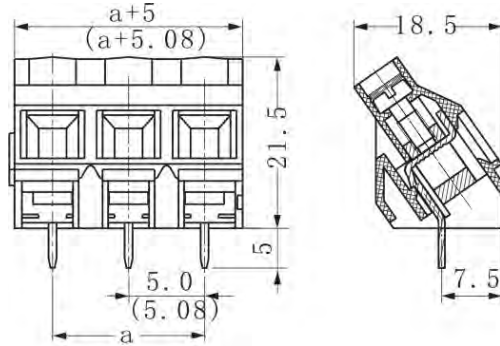

### 技术数据

IEC 数据	刚性	柔性	I	U
	导线	导线		
	mm <sup>2</sup>	mm <sup>2</sup>	A	V
连接数据	0.2-6	0.2-4	32	690
绝缘材料组别			I	
过电压类别		III	III	II
污染等级		3	2	2
额定电压(V)		690	1000	1000
额定冲击电压(KV)			8	
绝缘材料/阻燃等级			PA / UL94 V0	
螺钉/扭矩(-Nm)			M3 / 0.5-0.6	
剥线长度(mm)			8	
引脚尺寸(mm)			0.8x1.0	
线路板孔径(mm)			Φ1.3	
UL 数据				
额定电压/电流(V/A)			300 / 10	
压线范围(AWG)			30-10	

### Technical Data

IEC Data	Rigid	Flexible	I	U
	Solid	stranded		
	mm <sup>2</sup>	mm <sup>2</sup>	A	V
Connection data	0.2-6	0.2-4	32	690
Insulating Material Group			I	
Overvoltage Category		III	III	II
Pollution degree		3	2	2
Rate Voltage(V)		690	1000	1000
Rate impulse Voltage(KV)			8	
Insu. Material / Inflamm. class			PA / UL94 V0	
Screw/Torque(-Nm)			M3 / 0.5-0.6	
Stripping length(mm)			8	
Terminal Dimension(mm)			0.8x1.0	
PCB Hole diameter(mm)			Φ1.3	
UL Data				
Rate Voltage/Current(V/A)			300 / 10	
Wire Range(AWG)			30-10	

### 定货型号 How to Order No.

位数 No. of Positons	间距 pitch: 9.52mm
2	EL5AT-02-9.52
3	EL5AT-03-9.52

说明：以上为标准颜色：GN=Green 绿色，省略。

可拼接最长位数不超过 24 位。