


无螺纹型欧式 PCB 板接线端子 Screwless connection Euro for PCB terminal blocks

ES0.5HT

Pitch: 2.54 mm

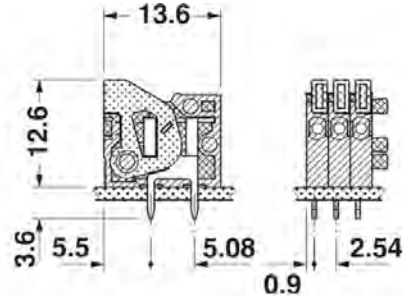

技术数据

IEC 数据	刚性 导线 mm ²	柔性 导线 mm ²	I A	U V
--------	-----------------------------	-----------------------------	--------	--------

连接数据 0.14-0.5 0.14-0.5 6 63

绝缘材料组别 I
过电压类别 III III II
污染等级 3 2 2
额定电压(V) 63 160 320
额定冲击电压(KV) 2.5 2.5 2.5
绝缘材料/阻燃等级 PA / UL94 V0

剥线长度(mm) 11
引脚尺寸(mm) 0.5x0.8
线路板孔径(mm) Φ1.2

UL 数据

额定电压/电流(V/A) 150 / 6
压线范围(AWG) 26-20

Technical Data

IEC Data	Rigid Solid mm ²	Flexible stranded mm ²	I A	U V
----------	-----------------------------------	---	--------	--------

Connection data 0.14-0.5 0.14-0.5 6 63

Insulating Material Group I
Overvoltage Category III III II
Pollution degree 3 2 2
Rate Voltage(V) 63 160 320
Rate impulse Voltage(KV) 2.5 2.5 2.5
Insu. Material / Inflamm. class PA / UL94 V0

Stripping length(mm) 11
Terminal Dimension(mm) 0.5x0.8
PCB Hole diameter(mm) Φ1.2

UL Data

Rate Voltage/Current(V/A) 150 / 6
Wire Range(AWG) 26-20

定货型号 How to Order No.

位数 No. of Positons	间距 pitch: 2.54mm
2	ES0.5HT-02-2.54
3	ES0.5HT-03-2.54
...	...
23	ES0.5HT-23-2.54
24	ES0.5HT-24-2.54

说明：以上为标准颜色：GN=Green 绿色，省略。