


欧式 PCB 板接线端子 Euro for PCB terminal blocks

EL1.5ATH

Pitch:5.0/5.08 mm

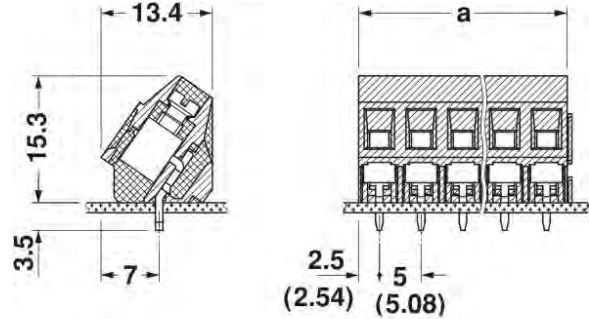

技术数据

IEC 数据	刚性	柔性	I	U
	导线	导线		
	mm ²	mm ²	A	V

连接数据	0.14	0.14	24	250
	-2.5	-2.5		

绝缘材料组别			I	
过电压类别		III	III	II
污染等级		3	2	2
额定电压(V)		250	320	630
额定冲击电压(KV)			4	
绝缘材料/阻燃等级			PA / UL94 V0	
螺钉/扭矩(-/Nm)			M3 / 0.5-0.6	
剥线长度(mm)			7	
引脚尺寸(mm)			0.9x0.9	
线路板孔径(mm)			Φ1.3	

UL 数据				
额定电压/电流(V/A)			300 / 15	
压线范围(AWG)			30-14	

Technical Data

IEC Data	Rigid	Flexible	I	U
	Solid	stranded		
	mm ²	mm ²	A	V

Connection data	0.14	0.14-2.5	24	250
	-2.5			

Insulating Material Group			I	
Overvoltage Category		III	III	II
Pollution degree		3	2	2
Rate Voltage(V)		250	320	630
Rate impulse Voltage(KV)			4	
Insu. material / Inflam. class			PA / UL94 V0	
Screw/Torque(-/Nm)			M3 / 0.5-0.6	
Stripping length(mm)			7	
Terminal Dimension(mm)			0.9x0.9	
PCB Hole diameter(mm)			Φ1.3	

UL Data				
Rate Voltage/Current(V/A)			300 / 15	
Wire Range(AWG)			30-14	

定货型号 How to Order No.

位数 No. of Positons	间距 pitch: 5.0mm	间距 pitch: 5.08mm
2	EL1.5ATH-02-5.0	EL1.5ATH-03-5.08
3	EL1.5ATH-03-5.0	EL1.5ATH-03-5.08

说明：以上为标准颜色：GN=Green 绿色，省略。

可拼接最长位数不超过 24 位。