


## 欧式 PCB 板接线端子 Euro for PCB terminal blocks



EL1A

Pitch:3.5/3.81 mm

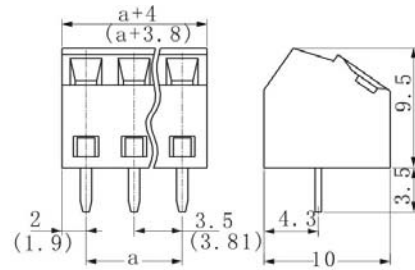

### 技术数据

IEC 数据	刚性	柔性	I	U
	导线	导线		
	mm <sup>2</sup>	mm <sup>2</sup>	A	V

连接数据	0.14	0.14	12	160
	-1.5	-1		

绝缘材料组别			I	
过电压类别		III	III	II
污染等级		3	2	2
额定电压(V)		160	200	400
额定冲击电压(KV)			2.5	
绝缘材料/阻燃等级			PA / UL94 V0	
螺钉/扭矩(-/Nm)			M2 / 0.22-0.25	
剥线长度(mm)			5	
引脚尺寸(mm)			0.5x0.9	
线路板孔径(mm)			Φ 1.1	

UL 数据	
额定电压/电流(V/A)	300 / 10
压线范围(AWG)	30-16

### Technical Data

IEC Data	Rigid	Flexible	I	U
	Solid	stranded		
	mm <sup>2</sup>	mm <sup>2</sup>	A	V

Connection data	0.14-	0.14-1	12	160
	1.5			

Insulating Material Group			I	
Overvoltage Category		III	III	II
Pollution degree		3	2	2
Rate Voltage(V)		160	200	400
Rate impulse Voltage(KV)			2.5	
Insu. material / Inflam. class			PA / UL94 V0	
Screw/Torque(-/Nm)			M2 / 0.22-0.25	
Stripping length(mm)			5	
Terminal Dimension(mm)			0.5x0.9	
PCB Hole diameter(mm)			Φ 1.1	

UL Data	
Rate Voltage/Current(V/A)	300 / 10
Wire Range(AWG)	30-16

### 定货型号 How to Order No.

位数 No. of Positons	间距 pitch: 3.5mm	间距 pitch: 3.81mm
2	EL1A-02-3.5	EL1A-02-3.81
3	EL1A-03-3.5	EL1A-03-3.81
...	...	...
15	EL1A-15-3.5	EL1A-15-3.81
16	EL1A-16-3.5	EL1A-16-3.81

说明：以上为标准颜色：GN=Green 绿色，省略。