


穿墙式插座 Feed-Through Sockets



S2.5FTVS

Pitch: 5.0/5.08 mm

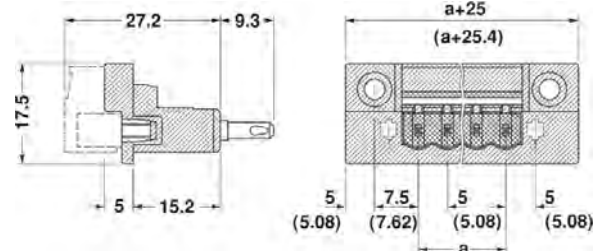

技术数据

IEC 数据	刚性	柔性	I	U
	导线	导线		
	mm ²	mm ²		
连接数据	0.2-2.5	0.2-2.5	12	250
绝缘材料组别			I	
污染等级		3	2	2
过电压类别		III	III	II
额定电压(V)		320	320	630
额定冲击电压(KV)			4	
绝缘材料/阻燃等级		PA / UL94 V0		
Slip-on 连接(DIN46249-1): (Imax/ nominal size)		8/2.8x0.8		
引脚尺寸(mm)			见图纸	

Technical Data

IEC Data	Rigid	Flexible	I	U
	Solid	stranded		
	mm ²	mm ²		
Connection data	0.2-2.5	0.2-2.5	12	250
Insulating Material Group			I	
Pollution degree		3	2	2
Overtoltage Category		III	III	II
Rate Voltage(V)		320	320	630
Rate impulse Voltage(KV)			4	
Insu. material / Inflam. class		PA / UL94 V0		
Slip-on connection (DIN46249-1): (Imax/ nominal size)		8/2.8x0.8		
Pin Dimensions (mm)			See description	

UL 数据

额定电压/电流(V/A)	300 / 10
压线范围(AWG)	-

UL Data

Rate Voltage/Current(V/A)	300 / 10
Wire Range(AWG)	-

定货型号 How to Order No.

位数 No. of Positons	间距 pitch: 5.0mm	间距 pitch: 5.08mm
2	S2.5FTVS-02-5.0	S2.5FTVS-02-5.08
3	S2.5FTVS-03-5.0	S2.5FTVS-03-5.08
...
15	S2.5FTVS-15-5.0	S2.5FTVS-15-5.08
16	S2.5FTVS-16-5.0	S2.5FTVS-16-5.08

说明：以上为标准颜色：GN=Green 绿色，省略。