


穿墙式插座 Feed-Through Sockets



S1.5FTVFS

Pitch: 3.81 mm

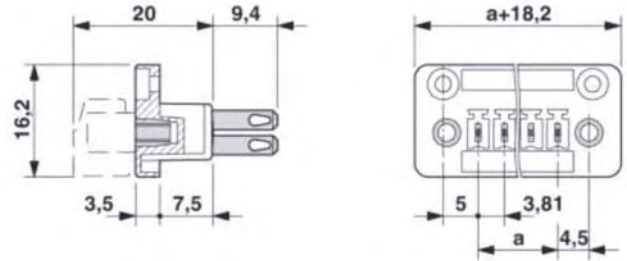

技术数据

| IEC 数据 | 刚性 | 柔性 | I | U |
|---|-----------------|-----------------|-----|-----|
| | 导线 | 导线 | | |
| | mm ² | mm ² | | |
| 连接数据 | 0.14 | 0.14 | 8 | 160 |
| | -1.5 | -1.5 | | |
| 绝缘材料组别 | | | I | |
| 污染等级 | | 3 | 2 | 2 |
| 过电压类别 | | III | III | II |
| 额定电压(V) | | 160 | 160 | 320 |
| 额定冲击电压(KV) | | | 2.5 | |
| 绝缘材料/阻燃等级 | | PA / UL94 V0 | | |
| Slip-on 连接(DIN46249-1): (Imax/ nominal size) | | 8/2.8x0.8 | | |
| 引脚尺寸(mm) | | | 见图纸 | |

Technical Data

| IEC Data | Rigid | Flexible | I | U |
|--|-----------------|-----------------|-----------------|-----|
| | Solid | stranded | | |
| | mm ² | mm ² | | |
| Connection data | 0.14-1.5 | 0.14-1.5 | 8 | 160 |
| Insulating Material Group | | | I | |
| Pollution degree | | 3 | 2 | 2 |
| Overtoltage Category | | III | III | II |
| Rate Voltage(V) | | 160 | 160 | 320 |
| Rate impulse Voltage(KV) | | | 2.5 | |
| Insu. material / Inflam. class | | PA / UL94 V0 | | |
| Slip-on connection (DIN46249-1): (Imax/ nominal size) | | 8/2.8x0.8 | | |
| Pin Dimensions (mm) | | | See description | |

UL 数据

| | |
|--------------|----------|
| 额定电压/电流(V/A) | 300 / 10 |
| 压线范围(AWG) | - |

UL Data

| | |
|---------------------------|----------|
| Rate Voltage/Current(V/A) | 300 / 10 |
| Wire Range(AWG) | - |

定货型号 How to Order No.

| 位数 No. of Positons | 间距 pitch: mm | 间距 pitch: 3.81mm |
|--------------------|--------------|-------------------|
| 2 | - | S1.5FTVFS-02-3.81 |
| 3 | - | S1.5FTVFS-03-3.81 |
| ... | ... | ... |
| 15 | - | S1.5FTVFS-15-3.81 |
| 16 | - | S1.5FTVFS-16-3.81 |

说明：以上为标准颜色：GN=Green 绿色，省略。